


# BupFoil-S

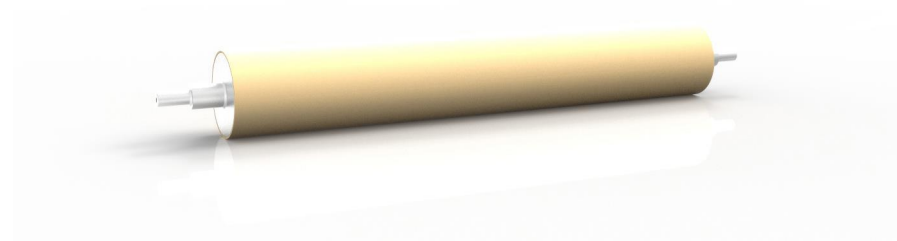

|                                       |   |
|---------------------------------------|---|
| <b>Cover Type:</b>                    | Rubber  |
| <b>Possible applications:</b>         | Nip and pressure rollers for plastic film.<br>Counterparts for MDO rollers.   |
| <b>Hardness Range:</b>                | 70 Shore A  |
| <b>Available Colours:</b>             | beige   |
| <b>Recommended Cover Thickness:</b>   | min. 12 mm - max. 25 mm   |
| <b>Temperature resistance:</b>        | Dry: continuous 110°C / peak 130°C<br>Wet: continuous 70°C / peak 80°C  |
| <b>Properties and advantages:</b>     | Good stability under load also at high temperature.<br>Very good abrasion and tear resistance.<br>Neutral behaviour in contact with various web types as plastic film, aluminium, non-woven etc.<br>Good oil and grease resistance.<br>Not recommended for contact with polar solvents like MEC and acetates and with aromatic solvents like toluene and benzene. |
| <b>Chemical resistance:</b>           | Acid solutions: Very good<br>Alkaline solutions: Good<br>Hot water and steam: Good<br>Ozone: Excellent<br>Oil and grease: Good<br>Chlorinated solvents: Not suited<br>Polar solvents (MEC, ether, acetate,...): Not suited  |
| <b>Recommended cleaning products:</b> | (Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid cleaners  |