


FeedCart-D

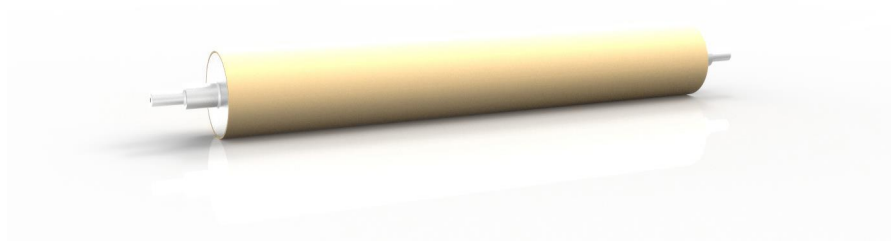

| | |
|---------------------------------------|--|
| Cover Type: | Special rubber |
| Possible applications: | Feed roll for corrugated cardboard machines. Thanks to its double layer system, very good abrasion resistance as well as very good flexibility. |
| Hardness Range: | 65 Shore A |
| Available Colours: | beige |
| Recommended Cover Thickness: | min. 20 mm - max. 40 mm |
| Temperature resistance: | Dry: continuous 70°C / peak 80°C |
| Properties and advantages: | Very good abrasion resistance Good water resistance Low resistance to oil and grease |
| Chemical resistance: | Acid solutions: Not suited Alkaline solutions: Not suited Hot water and steam: Not suited Ozone: Moderate Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited |
| Recommended cleaning products: | Water |