


# Tactilsize

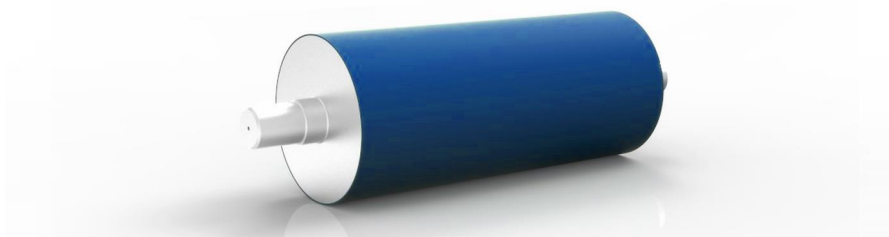

<b>Cover Type:</b>	Special rubber	
<b>Possible applications:</b>	Size Press and Film Press	
<b>Hardness Range:</b>	25, 40, 65, 80 PJ	
<b>Available Colours:</b>	blue	
<b>Recommended Cover Thickness:</b>	Standard 20 mm	max. 25 mm
<b>Temperature resistance:</b>	Dry:	continuous 90°C / peak 120°C
<b>Properties and advantages:</b>	Wear resistance Impact resistance Profile and hardness stability in operation	
<b>Doctoring:</b>	Edge doctoring: water-lubricated polyurethane or HDPE blades	
<b>Internal cooling:</b>	Recommended inlet T° of the cooling water : 30 and 45°C Adjust water flow until $5^{\circ}\text{C} < \Delta T \text{ outlet-inlet} < 10^{\circ}\text{C}$	
<b>Chemical resistance:</b>	Acid solutions:	Good
	Alkaline solutions:	Good
	Hot water and steam:	Good
	Ozone:	Good
	Oil and grease:	Excellent
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
<b>Remark:</b>	Reference list available on demand Good resistance to standard chemicals normally used in paper machines	