


# TopSpread-XR-AS

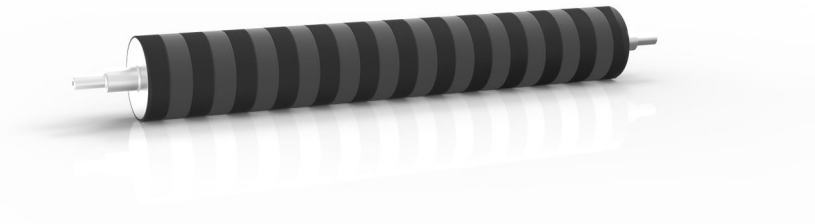

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	Web converting - plastic film, non-woven, paper, aluminium Spreader rolls for thin and delicate substrates Web spreading where grooved rollers mark or damage the substrate
<b>Hardness Range:</b>	30 Shore A
<b>Available Colours:</b>	black
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 15 mm
<b>Temperature resistance:</b>	Dry: continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Spreading effect without using grooves, based on : - grip difference between a harder smooth rubber and a soft sticky rubber - wavy surface that ensures grip on the web towards the edges  Keeps the web edges straight  A larger contact angle (90-180°) will improve the spreading effect  TopSpread-XR is easy to maintain and accepts most cleaning products
<b>Specific characteristics:</b>	Antistatic
<b>Chemical resistance:</b>	Acid solutions: Moderate Alkaline solutions: Moderate Hot water and steam: Moderate Ozone: Good Oil and grease: Very good Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Moderate Alcohols (ethanol, IPA,...): Good Ageing resistance: Very good
<b>Recommended cleaning products:</b>	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit