


# FlexoDrive S

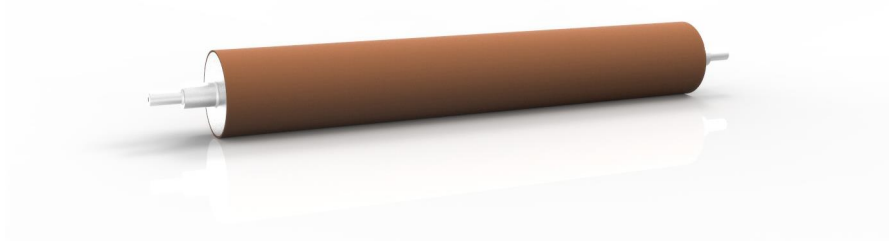

<b>Cover Type:</b>	Special polyurethane	
<b>Possible applications:</b>	Wire Suction roll, Millspaugh, Suction Couch roll / Suction cylinder	
<b>Hardness Range:</b>	5, 10, 20 PJ	
<b>Available Colours:</b>	brown	
<b>Recommended Cover Thickness:</b>	Standard 15 mm	max. 25 mm
<b>Temperature resistance:</b>	Dry:	continuous 80°C / peak 110°C
<b>Properties and advantages:</b>	Superior abrasion resistance Resistant to glazing Friction coefficient stable in operation and adapted to optimal wire driving Stable hardness and profile in operation	
<b>Doctoring:</b>	with HDPE blade, angle 15-22 degrees max. load 50 N/m, dry doctoring prohibited, oscillation recommended	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Moderate Very good Very good Good Not suited Not suited
<b>Remark:</b>	- reference list available on demand - good resistance to standard chemicals normally used in paper machines	