


Protecthane Plus

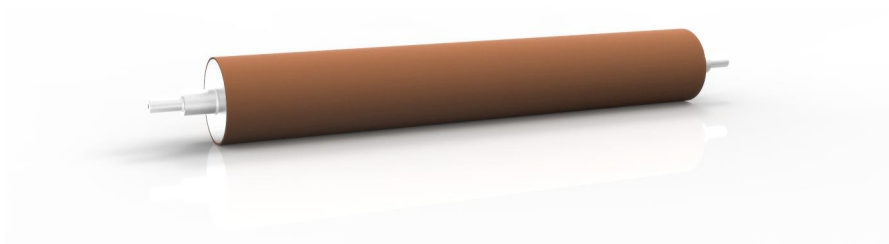

Cover Type:	Special polyurethane
Possible applications:	Reel spools
Hardness Range:	10, 15, 20, 25 PJ
Available Colours:	brown
Recommended Cover Thickness:	min. 10 mm - max. 20 mm
Temperature resistance:	Dry: continuous 80°C / peak 110°C
Properties and advantages:	Vibration dampening Resistant to the propagation of cuts Wear resistance
Specific characteristics:	Antistatic
Possible surface design:	P (plain), G (grooved)
Chemical resistance:	Acid solutions: Moderate Alkaline solutions: Moderate Hot water and steam: Very good Ozone: Very good Oil and grease: Good Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
Remark:	Reference list available on demand Good resistance to standard chemicals normally used in paper machines