


# WoodCoat-S

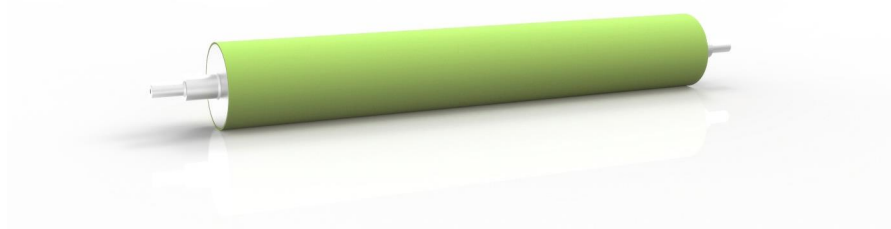

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Production of wood, wood board and wood laminate : - varnishing rollers, UV lacquering, decorative coating, impregnation - glue applicators, water or solvent based - catalyst and primer application  Possibility to foresee microgrooves up to 80 grooves/inch  Not recommended for oiling of wood	
<b>Hardness Range:</b>	35, 45, 55, 65, 75 Shore A	
<b>Available Colours:</b>	green	
<b>Recommended Cover Thickness:</b>	min. 12 mm - max. 25 mm	
<b>Temperature resistance:</b>	Dry:	continuous 120°C / peak 130°C
	Wet:	continuous 80°C / peak 90°C
<b>Properties and advantages:</b>	Good physical properties  Excellent resistance to polar solvents (MEC, acetates, alcohols...)  Very good surface wetting and transfer properties  High purity and homogeneity  Easy to grind and to groove	
<b>Chemical resistance:</b>	Acid solutions:	Excellent
	Alkaline solutions:	Excellent
	Hot water and steam:	Very good
	Ozone:	Excellent
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Excellent
	Alcohols (ethanol, IPA,...):	Excellent
	Ageing resistance:	Exceptional
<b>Recommended cleaning products:</b>	(Warm) water, soap, detergent, acid/alkaline cleaners, polar solvents : MEK, alcohol, acetate...	