


Accuthane

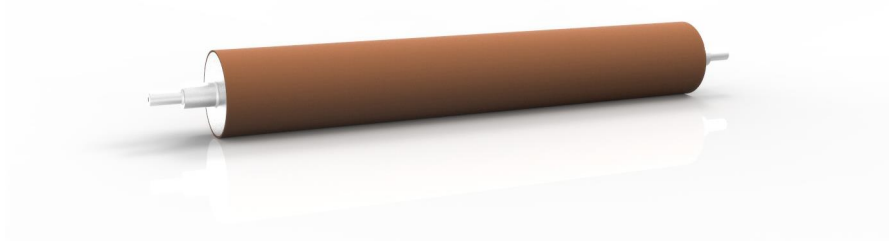

Cover Type:	Polyurethane	
Possible applications:	Steel and stainless steel strip processing: recommended quality for horizontal looper rollers and strip support rollers on pickling and tandem lines	
Hardness Range:	80, 90, 95 Shore A	
Available Colours:	brown	
Temperature resistance:	Dry:	continuous 90°C / peak 100°C
	Wet:	continuous 50°C / peak 60°C
Chemical resistance:	Acid solutions:	Moderate
	Alkaline solutions:	Moderate
	Hot water and steam:	Not suited
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Good
Recommended cleaning products:	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, with limited use : alcohol	