


# Accuthane-D

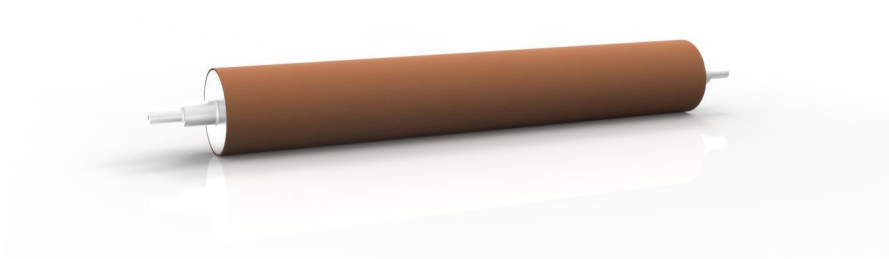

<b>Cover Type:</b>	Polyurethane	
<b>Possible applications:</b>	Steel and stainless steel strip processing: recommended quality for horizontal looper rollers and strip support rollers on pickling and tandem lines	
<b>Hardness Range:</b>	90, 95 Shore A	
<b>Available Colours:</b>	brown	
<b>Recommended Cover Thickness:</b>	min. 7 mm - max. 15 mm	
<b>Temperature resistance:</b>	Dry:	continuous 90°C / peak 100°C
	Wet:	continuous 50°C / peak 60°C
<b>Properties and advantages:</b>	<p>Double layer/double colour covering with a bright yellow base layer (4 mm), that can visually be used as abrasion witness This covering solutions allow to verify the abrasion on the roller cover in a safe way and from a distance</p> <p>Outstanding abrasion resistance</p> <p>Very good resistance to tear and cutting</p> <p>Specifically suited for the covering of large numbers with short delivery time</p>	
<b>Chemical resistance:</b>	Acid solutions:	Moderate
	Alkaline solutions:	Moderate
	Hot water and steam:	Not suited
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Good
<b>Recommended cleaning products:</b>	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, with limited use : alcohol	