


MultiGraf-SB

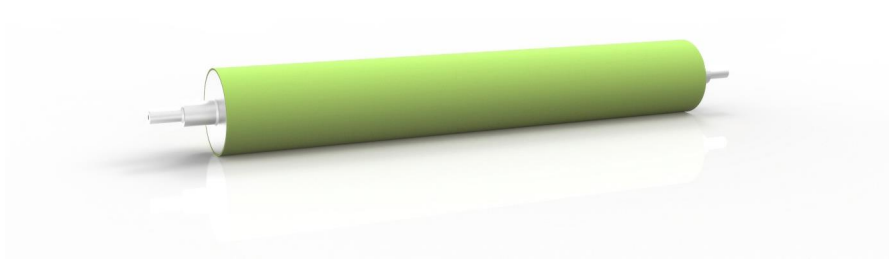

Cover Type:	Rubber
Possible applications:	Production and conversion of plastic film, flexible packaging, (card)board, tape, labels, adhesives and aluminium foil. Back-up rollers for solventless and solvent based coating and lamination processes. Rotogravure impression rollers for flexible packaging.
Hardness Range:	60, 65, 75, 80 Shore A
Available Colours:	green
Recommended Cover Thickness:	min. 10 mm - max. 20 mm
Temperature resistance:	Dry: continuous 110°C / peak 125°C Wet: continuous 80°C / peak 90°C
Properties and advantages:	Excellent resistance to polar solvents (MEK, ethyl acetate, alcohols). Outstanding surface properties in contact with various web types : paper, board, plastic film, aluminium. Very good overall physical properties and abrasion resistance. High purity and homogeneity
Chemical resistance:	Acid solutions: Very good Alkaline solutions: Very good Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Excellent Alcohols (ethanol, IPA,...): Excellent
Recommended cleaning products:	Polar solvents (MEK, ethyl acetate, alcohol...), detergents - avoid hydrocarbons !