


# HanneTop-L

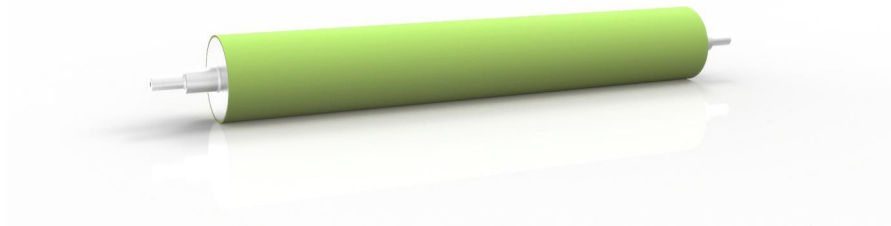

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	All industries: rollers, wheels & parts submitted to high mechanical and/or dynamical load at elevated temperature Furnace entry/exit rollers Converting industries: conveyor, nip, backing, embosser and laminator rollers Rollers & wheels in contact with oil, petroleum or kerosene at high temperature
<b>Hardness Range:</b>	70, 87, 96 Shore A
<b>Available Colours:</b>	green, blue
<b>Recommended Cover Thickness:</b>	min. 15 mm - max. 30 mm
<b>Temperature resistance:</b>	Dry: continuous 145°C / peak 160°C Wet: continuous 80°C / peak 90°C
<b>Properties and advantages:</b>	Very high mechanical and dynamical properties - high load resistance Special high-load and high-temperature bonding technology High temperature resistance (up to max 160 °C) Excellent resistance to grease, mineral oil, petroleum and kerosene Light colour - non staining
<b>Chemical resistance:</b>	Acid solutions: Moderate Alkaline solutions: Good Hot water and steam: Good Ozone: Very good Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited Alcohols (ethanol, IPA,...): Very good Ageing resistance: Excellent
<b>Recommended cleaning products:</b>	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit