


Hannethane-S

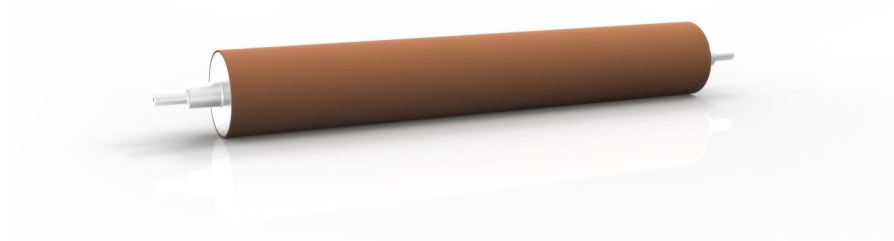

Cover Type:	Polyurethane	
Possible applications:	Production of metal strip : looper, strip support and conveyor rollers, bridle and detour rolls, pinch rolls All industries : conveyor, support and back-up rollers - generally rollers submitted to high abrasion Applications related to the textile, glass, wood, paper and board industry and to the production of packaging and plastic film	
Hardness Range:	60, 70, 80, 90, 95 Shore A 65 Shore D	
Available Colours:	black, beige, brown	
Recommended Cover Thickness:	min. 7 mm - max. 20 mm	
Temperature resistance:	Dry: Wet:	continuous 90°C / peak 100°C continuous 50°C / peak 60°C
Properties and advantages:	Excellent abrasion resistance Very good resistance to tear and cutting Very high elasticity Not recommended for wet environments above 60 °C	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Moderate Not suited Very good Excellent Not suited Not suited Not suited
Recommended cleaning products:	(Tepid) water, soap, industrial cleaners, cleaning fuel, turpentine, with limited use : alcohol	