


Lotus-XR

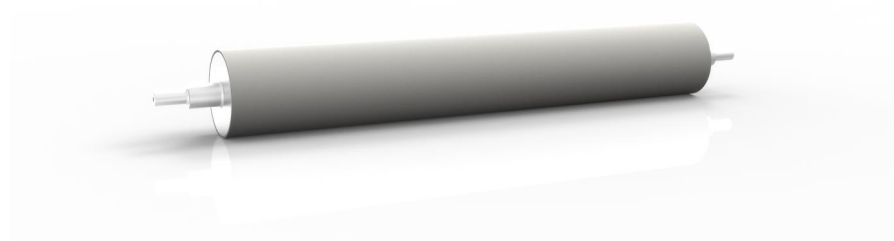

Cover Type:	Special cover
Possible applications:	Laminating rollers in bricks industry All applications with high temperature
Hardness Range:	65, 70 Shore A
Available Colours:	grey
Recommended Cover Thickness:	min. 10 mm - max. 25 mm
Temperature resistance:	Dry: continuous 200°C / peak 230°C Wet: continuous 200°C / peak 230°C
Properties and advantages:	Excellent resistance to temperature, bad weather conditions and ozone Excellent oil and grease resistance Good resistance to chlorinated solvents and acetates Low resistance to ketone solvents Good release properties
Specific characteristics:	Glue repellent/non-stick properties Improved web release properties
Chemical resistance:	Acid solutions: Good Alkaline solutions: Good Hot water and steam: Good Ozone: Excellent Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Good Chlorinated solvents: Good Polar solvents (MEC, ether, acetate,...): Not suited
Recommended cleaning products:	Water and suitable solvents