


# MultiCoat-XP

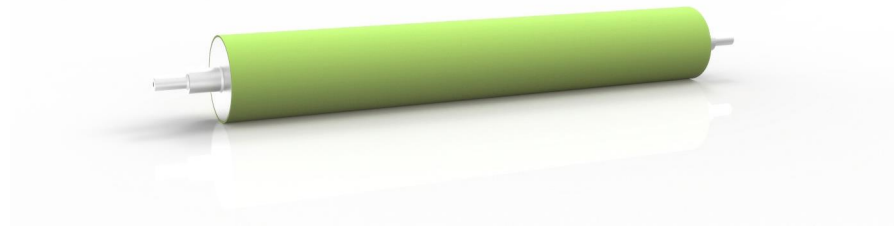

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	Production of steel, aluminium & non-ferrous coils : applicator rollers for chemical coating and for water-based lacquering and coating  Adhésives and label stock production : transfer and applicator rollers for siliconizing, glue and primer coating  Plastic film, paper and flexible packaging industry : coater and transfer rollers, lamination counterparts
<b>Hardness Range:</b>	50, 55, 60, 70, 80 Shore A
<b>Available Colours:</b>	green, grey
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 30 mm
<b>Temperature resistance:</b>	Dry: continuous 100°C / peak 120°C Wet: continuous 60°C / peak 80°C
<b>Properties and advantages:</b>	Excellent abrasion, tear and cut-in resistance  High surface energy, very good transfer properties and wettability  High purity and homogeneity  Very good resistance to water based and acid based coatings  Moderate resistance to solvents
<b>Chemical resistance:</b>	Acid solutions: Very good Alkaline solutions: Good Hot water and steam: Good Ozone: Excellent Oil and grease: Good Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Moderate Alcohols (ethanol, IPA,...): Very good
<b>Recommended cleaning products:</b>	(Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid cleaners