


MetalSqueeze-S

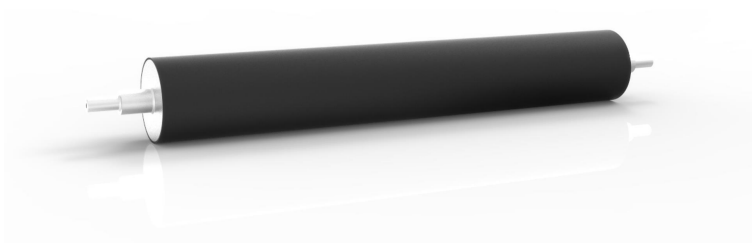

Cover Type:	Rubber	
Possible applications:	Steel and aluminium industry : squeegee rollers for acid pickling, for water rinse, for passivation and for cleaning sections after skin pass (temper mill)	
Hardness Range:	60, 70, 80 Shore A	
Available Colours:	black	
Recommended Cover Thickness:	min. 15 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 80°C / peak 90°C
	Wet:	continuous 70°C / peak 80°C
Properties and advantages:	<p>Very good physical properties, cut-in, tear and abrasion resistance</p> <p>High resilience, excellent squeegeeing properties, even at low pressure (low energy consumption)</p> <p>Good resistance to most acid, alkaline and oxydative products</p> <p>Not suited for contact with (mineral) oil and grease</p>	
Chemical resistance:	Acid solutions:	Very good
	Alkaline solutions:	Good
	Hot water and steam:	Good
	Ozone:	Moderate
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Moderate
Recommended cleaning products:	Water, warm water, soap and detergents, alcohol based cleaners, acid based cleaners	