


# MultiPrint-I

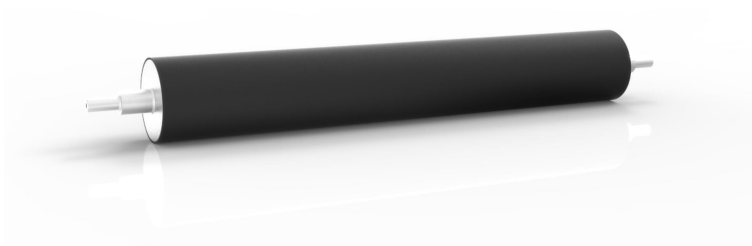

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Inking rollers	
<b>Hardness Range:</b>	25, 30, 35, 40, 45, 50, 55 Shore A	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 25 mm	
<b>Temperature resistance:</b>	Dry:	continuous 120°C / peak 130°C
	Wet:	continuous 110°C / peak 120°C
<b>Properties and advantages:</b>	Excellent resistance to oil and grease	
	Excellent resistance to abrasion and compression	
	Good heat resistance	
	Good resistance to diluted acids	
	Low resistance to chlorinated solvents and acetates	
<b>Chemical resistance:</b>	Acid solutions:	Good
	Alkaline solutions:	Good
	Hot water and steam:	Good
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
<b>Recommended cleaning products:</b>	Water and suitable solvents	
<b>Remark:</b>	Specially adapted to conventionnal inks	
	Good dispersal for ink transfer	
	Good resistance to solvents and cleaning products for conventionnal inks	