


# Hannecoil-S

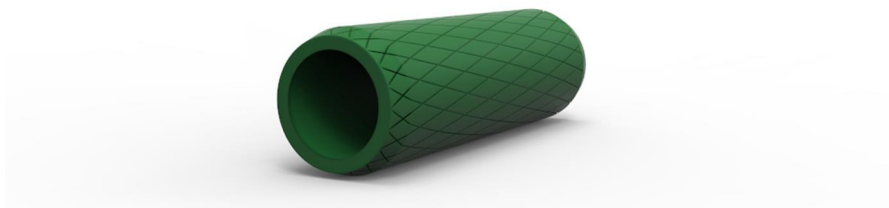

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Elastic mandrel sleeves for winding and unwinding of metal coils (steel, stainless steel, aluminium and non-ferrous coils)  Dimensions and finish can be adapted to any specific need : adaptor sleeves, protective sleeves, grip improvement, evacuation of water or oil etc.	
<b>Hardness Range:</b>	60, 70, 75, 80 Shore A	
<b>Available Colours:</b>	black, green	
<b>Recommended Cover Thickness:</b>	min. 5 mm - max. 100 mm	
<b>Temperature resistance:</b>	Dry: Wet:	continuous 100°C / peak 110°C continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Excellent elastic behaviour - low permanent deformation in use  Very good physical properties, tear-, cut-in and abrasion resistance  Excellent resistance to grease and to (mineral) oil  Good solvent resistance, accepts most cleaning products	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Good Very good Moderate Very good Excellent Moderate Not suited Not suited
<b>Recommended cleaning products:</b>	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	