


Hannecoil-S

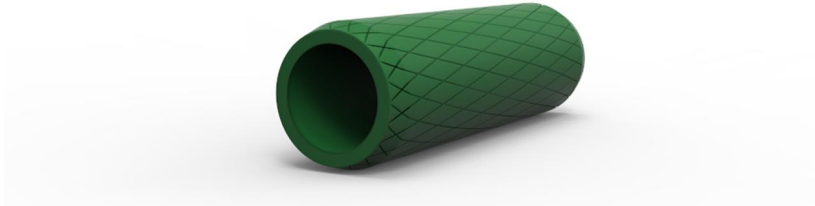

Cover Type:	Rubber
Possible applications:	Elastic mandrel sleeves for winding and unwinding of metal coils (steel, stainless steel, aluminium and non-ferrous coils) Dimensions and finish can be adapted to any specific need : adaptor sleeves, protective sleeves, grip improvement, evacuation of water or oil etc.
Hardness Range:	60, 70, 75, 80 Shore A
Available Colours:	black, green
Recommended Cover Thickness:	min. 5 mm - max. 100 mm
Temperature resistance:	Dry: continuous 100°C / peak 110°C Wet: continuous 70°C / peak 80°C
Properties and advantages:	Excellent elastic behaviour - low permanent deformation in use Very good physical properties, tear-, cut-in and abrasion resistance Excellent resistance to grease and to (mineral) oil Good solvent resistance, accepts most cleaning products
Chemical resistance:	Acid solutions: Good Alkaline solutions: Very good Hot water and steam: Moderate Ozone: Very good Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit