


# GelPrint-S

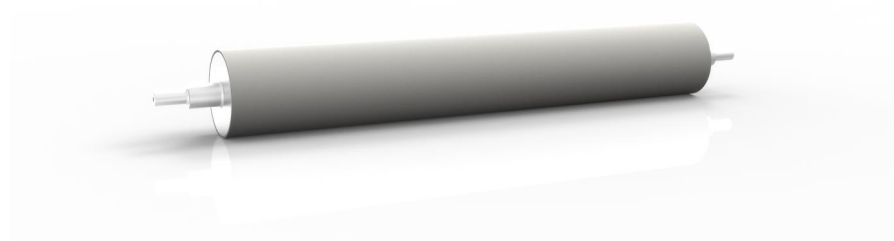

<b>Cover Type:</b>	Rubber
<b>Possible applications:</b>	Rotogravure impression rollers for printing on vinylic substrates as floor covering and wall paper
<b>Hardness Range:</b>	50, 60, 70, 75, 80 Shore A
<b>Available Colours:</b>	black, grey
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm
<b>Temperature resistance:</b>	Dry: continuous 120°C / peak 130°C Wet: continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Good mechanical and dynamical properties, also at low hardness. Neutral behaviour in contact with PVC, non-staining Excellent resistance to polar solvents like alcohol, MEC, acetate and ether. Overall good resistance to PVC plasticizers Not recommended in contact with oil and grease.
<b>Chemical resistance:</b>	Acid solutions: Very good Alkaline solutions: Very good Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Very good Alcohols (ethanol, IPA,...): Excellent
<b>Recommended cleaning products:</b>	(Hot) water, acid and alkaline cleaners, IPA and alcohol, MEC, ether, ethyl acetate
<b>Remark:</b>	Wet temperature resistance = in contact with PVC plasticizers