


NipFoil-HT-AS

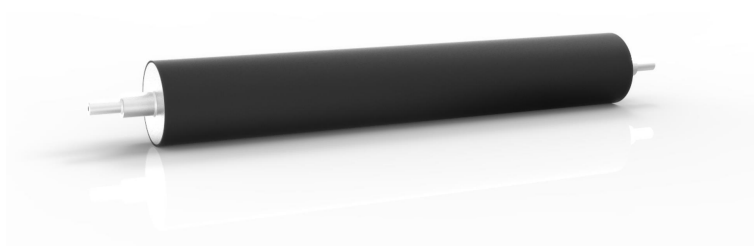

Cover Type:	Silicone rubber	
Possible applications:	High temperature applications related to the production of plastic film/foil and flexible packaging and where antistatic properties are required Laminator rolls, nip rolls, furnace entry- and exit rollers Backing rolls for glue application and hot-melt	
Hardness Range:	55, 70, 80 Shore A	
Available Colours:	black	
Recommended Cover Thickness:	min. 10 mm - max. 20 mm	
Temperature resistance:	Dry: Wet:	continuous 230°C / peak 250°C continuous 60°C / peak 80°C
Properties and advantages:	Excellent temperature resistance Excellent resistance to ozone and UV-radiation Neutral behaviour towards plastic film and other substrates Glue repellent - very good non-stick properties, good release properties for hot plastic film Antistatic (non-staining)	
Specific characteristics:	Antistatic Glue repellent/non-stick properties Improved web release properties	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Good Very good Excellent Good Not suited Not suited Moderate
Recommended cleaning products:	(Hot) water, soap, industrial cleaners, alcohol-based products, diluted acids, vinager	