


GelForm-XP

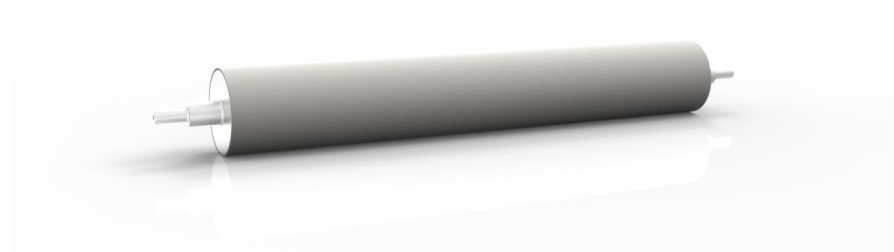

Cover Type:	Silicone rubber	
Possible applications:	Production, impregnation, gelifying, calendering and embossing of PVC (floor covering, wall paper, artificial leather, foil, liner, décor products etc.) Gelifying counterparts, roll coating applicator or counterpart, calender rolls, embosser rolls Counterparts for laminating	
Hardness Range:	40, 50, 60, 70, 75, 80 Shore A	
Available Colours:	grey	
Recommended Cover Thickness:	min. 15 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 180°C / peak 200°C
Properties and advantages:	Gut resistance to plasticizers used to make and transform PVC and soft plastics (phtalates, "Disflamoll"...) Resistant to high temperature environments Very good non-stick properties, excellent release of the PVC, easy to clean Silicone-solution giving good lifetime on machine	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Good Very good Excellent Moderate Not suited Not suited Moderate
Recommended cleaning products:	(Hot) water, steam, soap and detergents, industrial cleaners, alcohol based cleaners	
Remark:	Max. temperature in contact with plasticizers (PVC and soft plastics) : - continuous : 120 °C - limited use : 150 °C	