


MultiCoat-SB

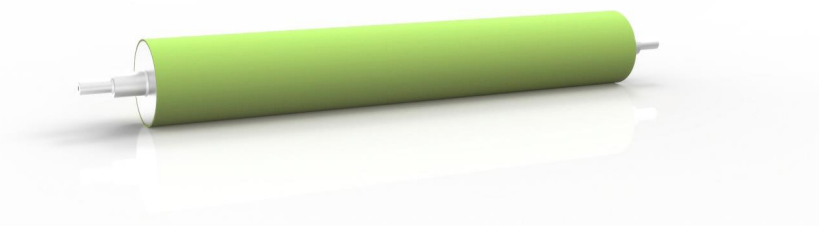

Cover Type:	Rubber
Possible applications:	Metals and metal packaging industry : applicator rollers and wheels for primer coating, lacquering, varnishing and chemical coating Wood and wood laminate : varnishing rollers, glue applicators Conversion of paper and film – adhesive and release stock : primer, glue and silicone applicator rollers and sleeves All converting of (printed) paper, board, film and flexible packaging : applicator, coater and (UV) varnishing rollers and sleeves, backing rollers and sleeves
Hardness Range:	35, 45, 55, 60, 65, 75, 80 Shore A
Available Colours:	green
Recommended Cover Thickness:	min. 15 mm - max. 30 mm
Temperature resistance:	Dry: continuous 80°C / peak 110°C Wet: continuous 90°C / peak 125°C
Properties and advantages:	Good physical properties Excellent resistance to polar solvents (MEC, acetates, alcohols...) Very good surface wetting and transfer properties High purity and homogeneity Easy to grind and to groove
Chemical resistance:	Acid solutions: Very good Alkaline solutions: Very good Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Excellent
Recommended cleaning products:	(Warm) water, soap, detergent, acid/alkaline cleaners, polar solvents : MEK, alcohol, acetate...