


BupFoil-S

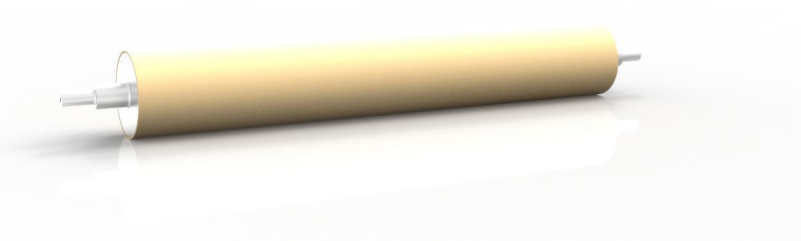

Cover Type:	Rubber
Possible applications:	Nip and pressure rollers for plastic film. Counterparts for MDO rollers.
Hardness Range:	70 Shore A
Recommended Cover Thickness:	min. 12 mm - max. 25 mm
Temperature resistance:	Dry: continuous 110°C / peak 130°C Wet: continuous 70°C / peak 80°C
Properties and advantages:	Good stability under load also at high temperature. Very good abrasion and tear resistance. Neutral behaviour in contact with various web types as plastic film, aluminium, non-woven etc. Good oil and grease resistance. Not recommended for contact with polar solvents like MEC and acetates and with aromatic solvents like toluene and benzene.
Chemical resistance:	Acid solutions: Very good Alkaline solutions: Good Hot water and steam: Good Ozone: Excellent Oil and grease: Good Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
Recommended cleaning products:	(Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid cleaners