PressoGraf-XP

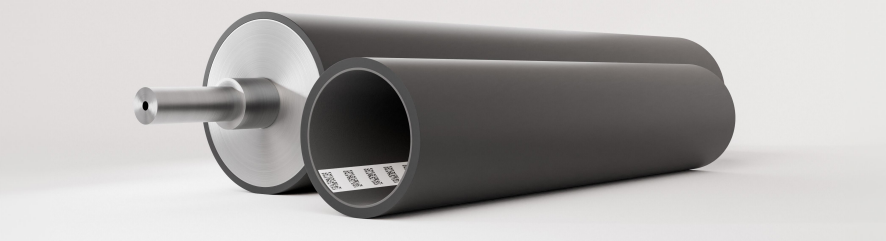

Cover Type:	Polyurethane	
Possible applications:	Pressure roll for rotogravure printing of flat cardboard, paper, plastic films Packaging, décor	
Hardness Range:	80, 90 Shore A	
Available Colours:	black	
Recommended Cover Thickness:	min. 10 mm - max. 20 mm	
Temperature resistance:	Dry: Wet:	continuous 80°C / peak 90°C continuous 50°C / peak 60°C
Properties and advantages:	Excellent abrasion resistance Very good cut and tear resistance Excellent resilience.	
Specific characteristics:	Antistatic Surface roughness (Ra):	 min. 0.4 µm - max. 6 µm
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...): Ageing resistance:	Moderate Moderate Very good Excellent Good Not suited Moderate Good Excellent Excellent
Recommended cleaning products:	Water, alcohol, IPA, ethyl acetate (no prolonged contact)	

HANNECARD
YOUR ROLLER EXPERT