


FlexoGraf-SB

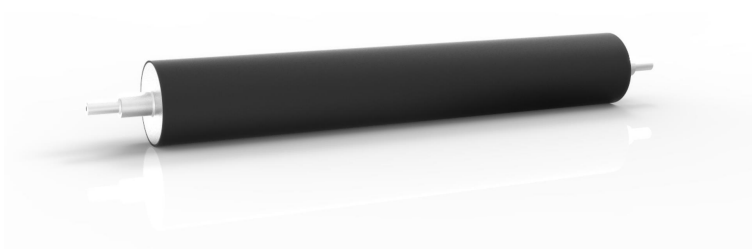

Cover Type:	Rubber	
Possible applications:	Fountain rollers for flexographic printing with solvent based inks, for cardboard or plastic film industry	
Hardness Range:	60, 65, 70, 75, 80, 90 Shore A	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 110°C / peak 130°C
	Wet:	continuous 80°C / peak 100°C
Properties and advantages:	Excellent resistance to water, ozone and bad weather conditions	
	Very good resistance to ketone solvents and acetates	
	Good heat resistance	
	Low resistance to oil and grease	
Specific characteristics:	Antistatic	
Chemical resistance:	Acid solutions:	Excellent
	Alkaline solutions:	Excellent
	Hot water and steam:	Very good
	Ozone:	Excellent
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Very good
Recommended cleaning products:	Water or compatible solvents	