


# NipFoil-S-AS

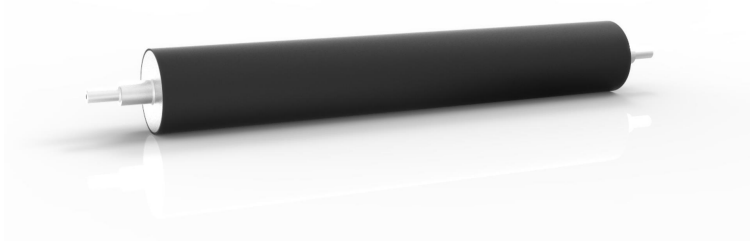

<b>Cover Type:</b>	Rubber
<b>Possible applications:</b>	Production and conversion of plastic films, adhesives and flexible packaging : nip and press rollers, guiding and conveyor rollers, lamination.  Contact and lay-on rollers for winding  Nip rollers for corona treaters thanks to high antistatic properties.
<b>Hardness Range:</b>	35, 50, 55, 60, 65, 70, 75, 80, 85, 90 Shore A
<b>Available Colours:</b>	black
<b>Recommended Cover Thickness:</b>	min. 6 mm - max. 25 mm
<b>Temperature resistance:</b>	Dry: continuous 110°C / peak 130°C Wet: continuous 80°C / peak 90°C
<b>Properties and advantages:</b>	Very good mechanical and dynamical properties.  Neutral behaviour in contact with all kind of plastic films.  Excellent resistance to polar solvents.  Not recommended in contact with oils and greases
<b>Specific characteristics:</b>	Antistatic
<b>Chemical resistance:</b>	Acid solutions: Excellent Alkaline solutions: Excellent Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Excellent Alcohols (ethanol, IPA,...): Excellent Ageing resistance: Excellent
<b>Recommended cleaning products:</b>	(Hot) water, acid and alkaline cleaners, IPA and alcohol, MEC, ether, ethyl acetate