


PressoGraf-SB

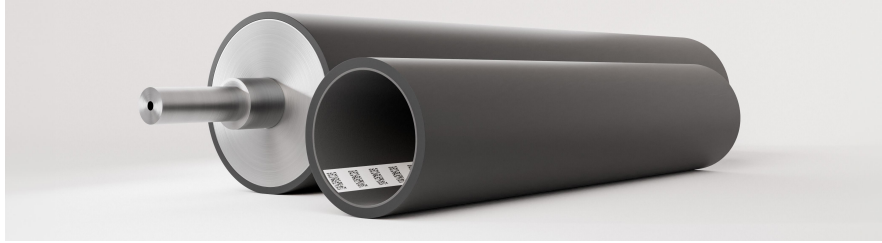

| | |
|---------------------------------------|---|
| Cover Type: | Rubber |
| Possible applications: | Production and conversion of plastic film, PVC, flexible packaging, (card)board, tape, labels, adhesives and aluminium foil : rollers where solvent resistance and antistatic properties are required Rollers for lamination, both solventless and solvent based - cold and hot lamination Backing rollers for (hot melt) glue application, printing and coating Cover quality adapted for composite sleeves |
| Hardness Range: | 70, 75, 80, 85, 90 Shore A |
| Recommended Cover Thickness: | min. 10 mm - max. 25 mm |
| Temperature resistance: | Dry: continuous 110°C / peak 130°C Wet: continuous 80°C / peak 95°C |
| Properties and advantages: | Good and stable electrical conductivity (antistatic properties) Excellent resistance against polar solvents, like MEC and ethyle acetate |
| Specific characteristics: | Antistatic |
| Chemical resistance: | Acid solutions: Very good Alkaline solutions: Very good Hot water and steam: Very good Ozone: Excellent Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Excellent Alcohols (ethanol, IPA,...): Excellent Ageing resistance: Excellent |
| Recommended cleaning products: | Polar solvents (MEK, ethyl acetate, alcohol...), detergents - avoid hydrocarbons ! |