PressoGraf-SB

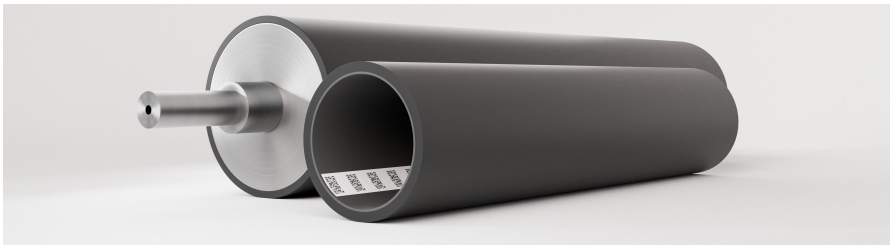

Тип покрытия:	Caucho	
Возможное назначение:	Production and conversion of plastic film, PVC, flexible packaging, (card)board, tape, labels, adhesives and aluminium foil : rollers where solvent resistance and antistatic properties are required Rollers for lamination, both solventless and solvent based - cold and hot lamination Backing rollers for (hot melt) glue application, printing and coating Cover quality adapted for composite sleeves	
Диапазон твердости:	70, 75, 80, 85, 90 Shore A	
Доступные цвета:	черный	
Рекомендуемая толщина покрытия:	мин. 10 mm - макс. 25 mm	
Температурная стойкость:	сухие условия: влажные условия:	постоянно 110°C / пиковые значения 130°C постоянно 80°C / пиковые значения 95°C
Характеристики и преимущества:	O Good and stable electrical conductivity (antistatic properties) Excellent resistance against polar solvents, like MEC and ethyle acetate	
Специальные характеристики:	Антистатика	
Химическая стойкость:	Кислотные растворы: Щелочные растворы: Горячая вода и пар: Озон: Смазочные материалы: Ароматические растворители (толуол, бензол, ...): Хлорированные растворы: Полярные растворители(МЕК, ацетон,...): Спирты (этанол, IPA,...): Сопротивление старению:	Очень хорошо Очень хорошо Очень хорошо Отлично Не подходит Не подходит Не подходит Отлично Отлично Отлично
Рекомендуемые средства очистки:	Полярные растворители (МЭК, этилацетат, спирт...), детергенты - избегать углеводороды!	

HANNECARD
YOUR ROLLER EXPERT