


BupFoil-XP

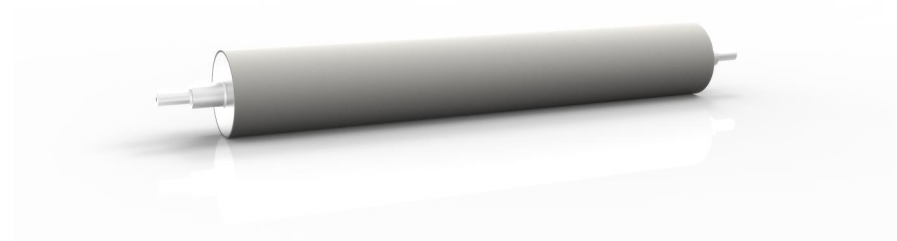

| | | |
|---------------------------------------|---|--|
| Cover Type: | Silicone rubber | |
| Possible applications: | Counterpart rollers for film extrusion-lamination and embossing | |
| Hardness Range: | 60, 70, 75, 80 Shore A | |
| Available Colours: | grey | |
| Recommended Cover Thickness: | min. 15 mm - max. 25 mm | |
| Temperature resistance: | Dry: | continuous 180°C / peak 220°C |
| Properties and advantages: | Excellent deformation recovery. Stable mechanical and dynamical properties on the working range of temperatures. Compatible with high speed processes. Possible in double hardness. Non Staining. | |
| Chemical resistance: | Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): | Moderate Good Very good Excellent Good Not suited Moderate |
| Recommended cleaning products: | (Hot) water, steam, soap and detergents, industrial cleaners, alcohol based cleaners | |
| Remark: | BupFoil-XPD : double hardness solution | |