


BupFoil-XP

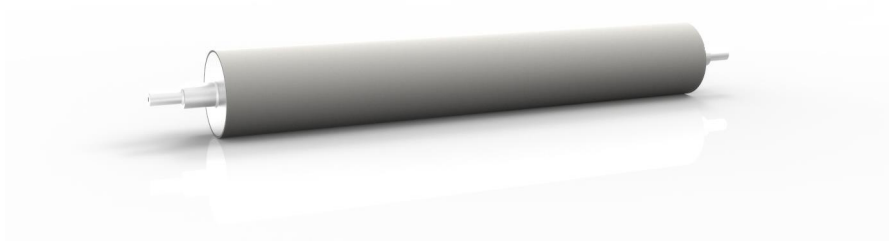

Cover Type:	Silicone rubber	
Possible applications:	Counterpart rollers for film extrusion-lamination and embossing	
Hardness Range:	60, 70, 75, 80, 90 Shore A	
Recommended Cover Thickness:	min. 15 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 180°C / peak 220°C
Properties and advantages:	Excellent deformation recovery. Stable mechanical and dynamical properties on the working range of temperatures. Compatible with High speed processes. Non Staining.	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Good Very good Excellent Good Not suited Moderate
Recommended cleaning products:	(Hot) water, steam, soap and detergents, industrial cleaners, alcohol based cleaners	
Remark:	BupFoil-XPD : double hardness solution	