


# FlexoGraf-L

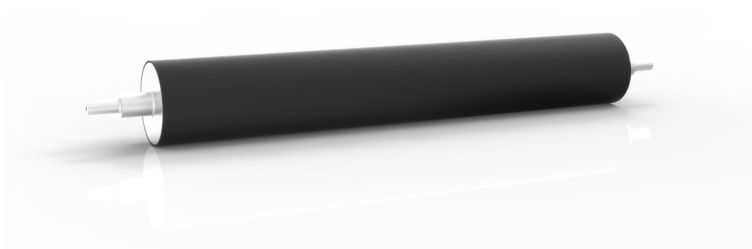

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Recommended coating for flexographic printing cliché rollers	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 25 mm	
<b>Temperature resistance:</b>	Dry:	continuous 110°C / peak 130°C
	Wet:	continuous 80°C / peak 100°C
<b>Properties and advantages:</b>	Excellent resistance to water, ozone and bad weather conditions	
	Very good resistance to ketone solvents and acetates	
	Low resistance to oil and grease	
	This coating can be laser engraved	
<b>Chemical resistance:</b>	Acid solutions:	Excellent
	Alkaline solutions:	Excellent
	Hot water and steam:	Very good
	Ozone:	Excellent
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Very good
<b>Recommended cleaning products:</b>	Water and compatible solvents	
<b>Remark:</b>	This coating can be applied on a metallic roll as well as on a glass fiber sleeve	