


# FeedCart-M

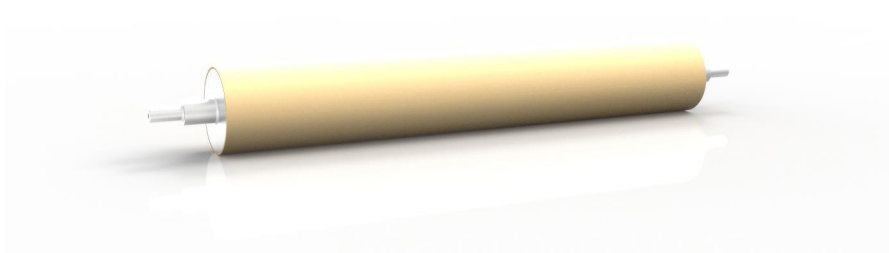

<b>Cover Type:</b>	Rubber	
<b>Possible applications:</b>	Feed roller on corrugated cardboard machins Drive rollers	
<b>Hardness Range:</b>	45, 53 Shore A	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 30 mm	
<b>Temperature resistance:</b>	Dry:	continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Very good abrasion resistance Good water resistance Low resistance to oil and grease	
<b>Chemical resistance:</b>	Acid solutions:	Not suited
	Alkaline solutions:	Not suited
	Hot water and steam:	Not suited
	Ozone:	Moderate
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
<b>Recommended cleaning products:</b>	Water	