


# FeedCart-D

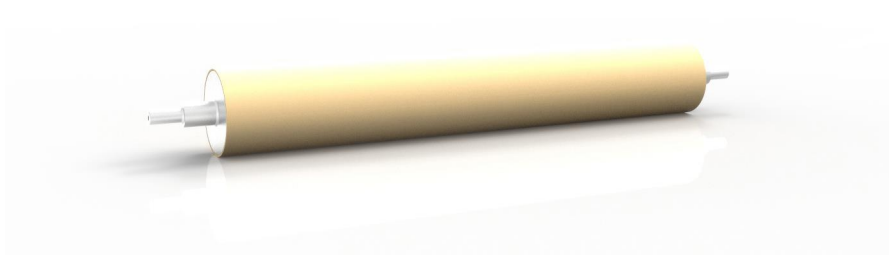

<b>Cover Type:</b>	Special rubber	
<b>Possible applications:</b>	Feed roll for corrugated cardboard machines.  Thanks to its double layer system, very good abrasion resistance as well as very good flexibility.	
<b>Hardness Range:</b>	65 Shore A	
<b>Recommended Cover Thickness:</b>	min. 20 mm - max. 40 mm	
<b>Temperature resistance:</b>	Dry:	continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Very good abrasion resistance  Good water resistance  Low resistance to oil and grease	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Not suited Not suited Not suited Moderate Not suited Not suited Not suited Not suited
<b>Recommended cleaning products:</b>	Water	