


# FeedCart-D

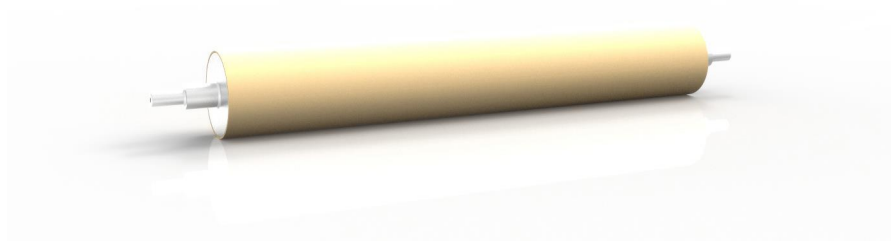

<b>Cover Type:</b>	Special rubber
<b>Possible applications:</b>	Feed roll for corrugated cardboard machines. Thanks to its double layer system, very good abrasion resistance as well as very good flexibility.
<b>Hardness Range:</b>	65 Shore A
<b>Recommended Cover Thickness:</b>	min. 20 mm - max. 40 mm
<b>Temperature resistance:</b>	Dry: continuous 70°C / peak 80°C
<b>Properties and advantages:</b>	Very good abrasion resistance Good water resistance Low resistance to oil and grease
<b>Chemical resistance:</b>	Acid solutions: Not suited Alkaline solutions: Not suited Hot water and steam: Not suited Ozone: Moderate Oil and grease: Not suited Aromatic solvents (toluene, benzene,...): Not suited Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
<b>Recommended cleaning products:</b>	Water