


HanneStar-AS

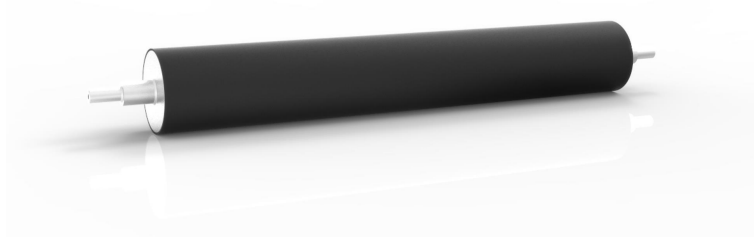

Cover Type:	Rubber	
Possible applications:	<p>Diverse applications in a lot of industrial areas : textile, packaging, (card)board, plastic film, converting, glass, wood etc., requiring good physical and antistatic properties</p> <p>Plastic film production & conversion, flexible packaging - winding & slitting : nip, conveyor and lay-ojn rollers, spreader rollers, stripping rollers</p> <p>Rollers and wheels in contact with oil, fuel or grease, needing antistatic properties or in ATEX environment</p>	
Hardness Range:	45, 50, 60, 65, 70, 80 Shore A	
Available Colours:	black	
Recommended Cover Thickness:	min. 6 mm - max. 25 mm	
Temperature resistance:	Dry:	continuous 90°C / peak 110°C
	Wet:	continuous 60°C / peak 80°C
Properties and advantages:	<p>Excellent resistance to mineral and vegetal oil, fuel, grease and (animal) fat</p> <p>Very good physical properties, tear and abrasion resistance, good elasticity and resilience</p> <p>Antistatic</p>	
Specific characteristics:	Antistatic	
Chemical resistance:	Acid solutions:	Good
	Alkaline solutions:	Very good
	Hot water and steam:	Good
	Ozone:	Good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Very good
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	