


WoodBond-S

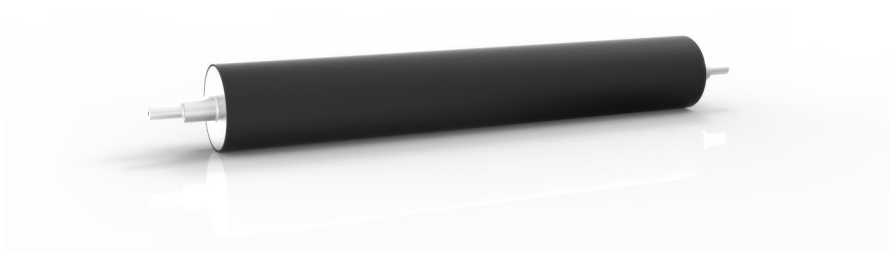

Cover Type:	Rubber	
Possible applications:	Production of wood, wood board and wood laminate : - applicator and transfer rollers for cold glue, water or formaldehyde based - applicator rollers for hardeners and catalysts	
Hardness Range:	40, 45, 50, 65, 70, 80, 95 Shore A	
Recommended Cover Thickness:	min. 10 mm - max. 20 mm	
Temperature resistance:	Dry: Wet:	continuous 100°C / peak 110°C continuous 60°C / peak 70°C
Properties and advantages:	Very good surface wetting and transfer properties Good physical properties and lifetime High purity and homogeneity Excellent oil resistance Easy to grind and to groove	
Specific characteristics:	Semi-conductor	
Doctoring:	TEST	
Internal cooling:	TEST	
Max. linear load:	fTEST	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...): Ageing resistance:	Moderate Good Moderate Very good Wyjątkowy Moderate Not suited Not suited Very good Excellent
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	

WoodBond-S