


NipFoil-Plus

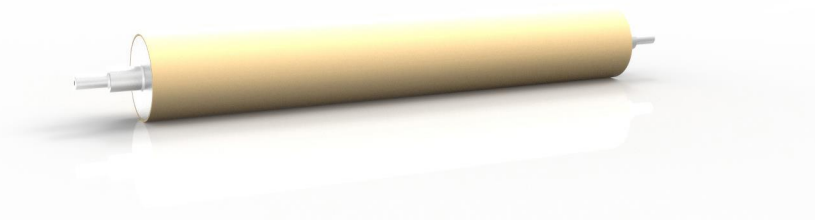

Cover Type:	Special rubber
Possible applications:	Production of plastic film : nip rollers, deflector rollers, guiding and tensioning rollers, laminator rollers (not antistatic) Production of flexible packaging, adhesives, tape & label stock : high temperature laminator rollers Rollers used in the conversion of fabric, tissue, glass fibre, carbon fibre and non-woven materials Hacker rollers for the production of plastic granulate
Hardness Range:	70 Shore A
Available Colours:	beige
Recommended Cover Thickness:	min. 12 mm - max. 25 mm
Temperature resistance:	Dry: continuous 110°C / peak 130°C Wet: continuous 70°C / peak 80°C
Properties and advantages:	Good stability under load also at high temperature Very good abrasion and tear resistance Neutral behaviour in contact with various web types as plastic film, aluminium, non-woven etc. Good oil and grease resistance Not recommended for contact with polar solvents like MEC and acetates and with aromatic solvents like toluene and benzene
Chemical resistance:	Acid solutions: Very good Alkaline solutions: Good Hot water and steam: Good Ozone: Excellent Oil and grease: Good Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
Recommended cleaning products:	(Warm) water, soap, industrial cleaners and detergents, alcohol, (diluted) acid cleaners