


# Hannefilt-XP

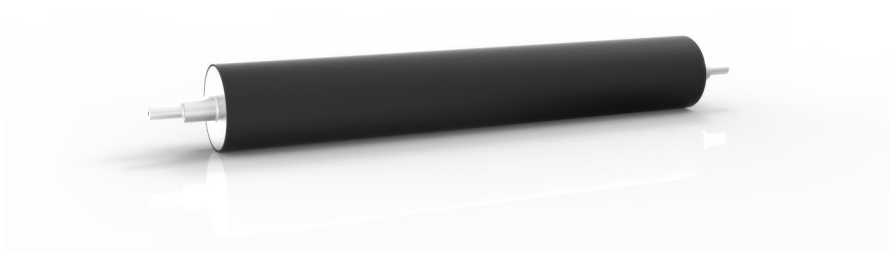

<b>Cover Type:</b>	Special polyurethane	
<b>Hardness Range:</b>	70 Shore A	
<b>Recommended Cover Thickness:</b>	min. 4 mm - max. 25 mm	
<b>Temperature resistance:</b>	Dry:	continuous 80°C / peak 90°C
	Wet:	continuous 40°C / peak 50°C
<b>Properties and advantages:</b>	<p>Covering quality specially developped and used for the production of cigarette filters. Vs other elastomers it has excellent mechanical properties, upto 3x better. This results in assistance to a longlasting homogenous filling of the cigarette of the cellulose acetate. Resists to the agents used for the processing of the cellulose acetate for processing, flavor, softening, flame retarding, ... The covering quality has antistatic properties and as such its helps to avoid dust attraction during the process.</p>	
<b>Specific characteristics:</b>	Antistatic	