


Hanneresist-DL

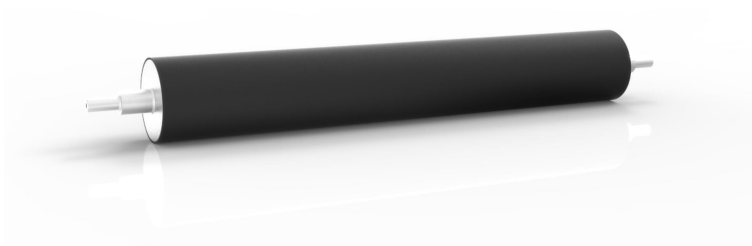

Cover Type:	Special polyurethane	
Possible applications:	Rotogravure Printing with ESA Compatible with all Direct Charge / Direct Load ESA Systems	
Hardness Range:	86 Shore A	
Available Colours:	black	
Recommended Cover Thickness:	min. 10 mm - max. 20 mm	
Temperature resistance:	Dry:	continuous 80°C / peak 90°C
	Wet:	continuous 30°C / peak 40°C
Properties and advantages:	Very high load resistance, very good dynamical properties with low heat build-up. Remarkable abrasion, cut and tear resistance. High resistance against printing solvents. Compatible with ESA Direct Charge / Direct Load systems.	
Specific characteristics:	Semi-conductor	
Recommended cleaning products:	Water, soap & detergents, alcohol based cleaners	