


# Flexolys® Foam

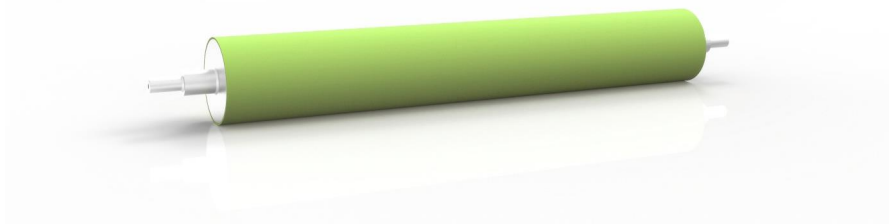

<b>Cover Type:</b>	Polyurethane foam	
<b>Possible applications:</b>	Winder Drum roll, Winder Rider roll	
<b>Hardness Range:</b>	37 Shore A	
<b>Recommended Cover Thickness:</b>	Standard 15 mm	max. 25 mm
<b>Temperature resistance:</b>	Dry:	continuous 70°C / peak 90°C
<b>Properties and advantages:</b>	Outstanding vibration absorption Reduced paper waste during winding Significant lifetime increase compared to existing solutions Resistant to cut propagation Homogeneous winding tension	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Not suited Not suited Not suited Good Very good Not suited Not suited
<b>Recommended cleaning products:</b>	- Good resistance to standard chemicals normally used in paper	
<b>Remark:</b>	- Reference list available on demand	