


Tactilsize

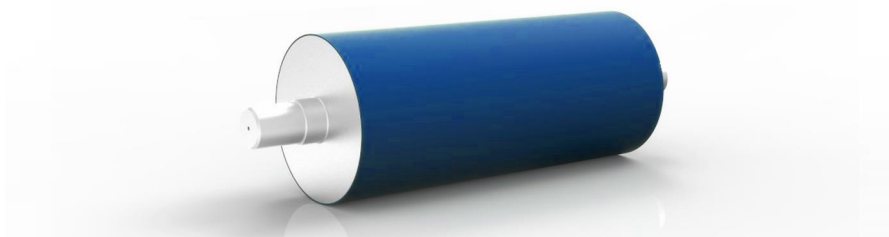

Cover Type:	Special rubber	
Possible applications:	Size Press and Film Press	
Hardness Range:	25, 65, 80 PJ	
Available Colours:	blue	
Recommended Cover Thickness:	Standard 20 mm	max. 25 mm
Temperature resistance:	Dry:	continuous 90°C / peak 120°C
Properties and advantages:	Wear resistance Impact resistance Profile and hardness stability in operation	
Doctoring:	Edge doctoring: water-lubricated polyurethane or HDPE blades	
Internal cooling:	Recommended inlet T° of the cooling water : 30 and 45°C Adjust water flow until $5^{\circ}\text{C} < \Delta T \text{ outlet-inlet} < 10^{\circ}\text{C}$	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Good Good Good Good Excellent Not suited Not suited
Remark:	Reference list available on demand Good resistance to standard chemicals normally used in paper machines	