


OptiGloss Plus

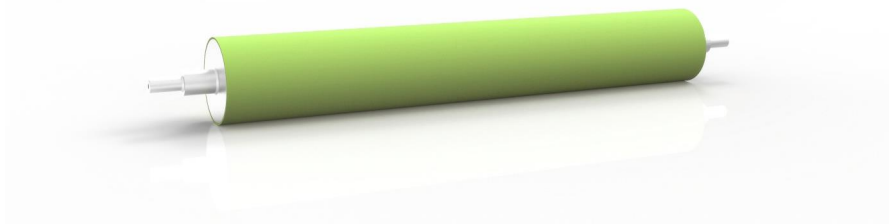

Cover Type:	Special rubber	
Possible applications:	Calendering, lamination and embosser counterparts for the production and transformation of PVC-sheet and other soft plastics Specifically suited for back-side gloss control, aspect control and non-blocking properties	
Recommended Cover Thickness:	min. 10 mm - max. 25 mm	
Temperature resistance:	Dry: Wet:	continuous 110°C / peak 125°C continuous 70°C / peak 80°C
Properties and advantages:	Special cover with very constant, slightly rough surface aspect Neutral behaviour in contact with PVC and soft plastics, non staining Good resistance against phthalates and most plasticizers used for the PVC-production	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...):	Good Good Good Very good Not suited Not suited Not suited Very good Excellent
Recommended cleaning products:	(Hot) water, acid and alkaline cleaners, IPA and alcohol, MEC, ether, ethyl acetate	
Remark:	Wet temperature limits = in plasticizer environment Because of the increased use of oily plasticizers, Hannecard recommends to carry out chemical resistance tests in case of doubt	