


Hardsqueeze

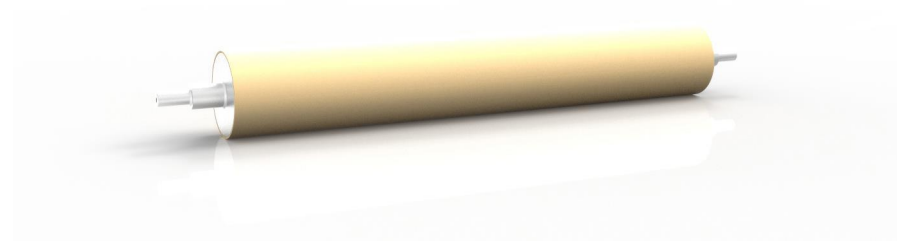

Cover Type:	Hard rubber (ebonite)	
Possible applications:	Textile wet finishing & sizing: foulard squeeze roll, sink and deflector roll, outlet roller Diverse applications in a lot of industrial areas: textile, metal, wood, ..., where excellent chemical stability and high hardness is required	
Hardness Range:	85 Shore D	
Recommended Cover Thickness:	min. 2 mm - max. 20 mm	
Temperature resistance:	Dry:	continuous 90°C / peak 95°C
	Wet:	continuous 90°C / peak 95°C
Properties and advantages:	Stable, hardwearing material High chemical stability in hot water, acid and alkaline environment up to 95°C	
Chemical resistance:	Acid solutions:	Very good
	Alkaline solutions:	Good
	Hot water and steam:	Very good
	Ozone:	Moderate
	Oil and grease:	Not suited
	Aromatic solvents (toluene, benzene,...):	Not suited
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Moderate
	Alcohols (ethanol, IPA,...):	Very good
Recommended cleaning products:	Water, warm water, soap and detergents, alcohol based cleaners, acid based cleaners	