


# Protecthane Plus

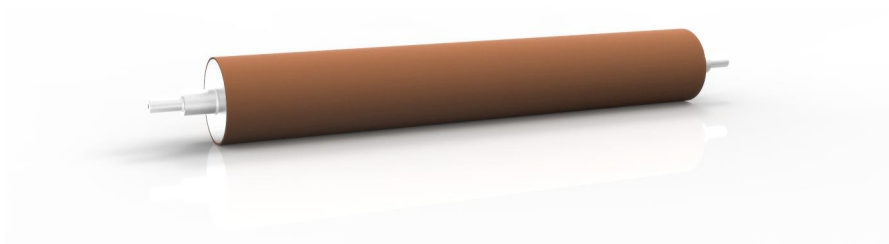

<b>Cover Type:</b>	Special polyurethane
<b>Possible applications:</b>	Reel spools
<b>Hardness Range:</b>	10, 15, 20, 25 PJ
<b>Available Colours:</b>	brown
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 20 mm
<b>Temperature resistance:</b>	Dry: continuous 80°C / peak 110°C
<b>Properties and advantages:</b>	Vibration dampening Resistant to the propagation of cuts Wear resistance
<b>Specific characteristics:</b>	Antistatic
<b>Possible surface design:</b>	P (plain), G (grooved)
<b>Chemical resistance:</b>	Acid solutions: Moderate Alkaline solutions: Moderate Hot water and steam: Very good Ozone: Very good Oil and grease: Good Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
<b>Remark:</b>	Reference list available on demand Good resistance to standard chemicals normally used in paper machines