


Protectthane Plus

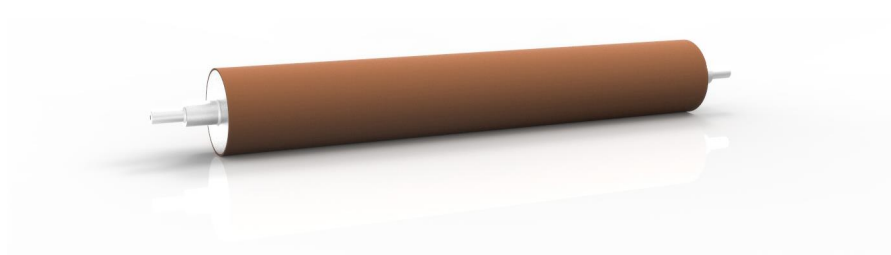

Cover Type:	Special polyurethane	
Possible applications:	Reel spools	
Hardness Range:	10, 15, 20, 25 PJ	
Available Colours:	brown	
Recommended Cover Thickness:	min. 10 mm - max. 20 mm	
Temperature resistance:	Dry:	continuous 80°C / peak 110°C
Properties and advantages:	Vibration dampening Resistant to the propagation of cuts Wear resistance	
Specific characteristics:	Antistatic	
Possible surface design:	P (plain), G (grooved)	
Chemical resistance:	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Chlorinated solvents: Polar solvents (MEC, ether, acetate,...):	Moderate Moderate Very good Very good Good Not suited Not suited
Remark:	Reference list available on demand Good resistance to standard chemicals normally used in paper machines	