


HanneTop-L

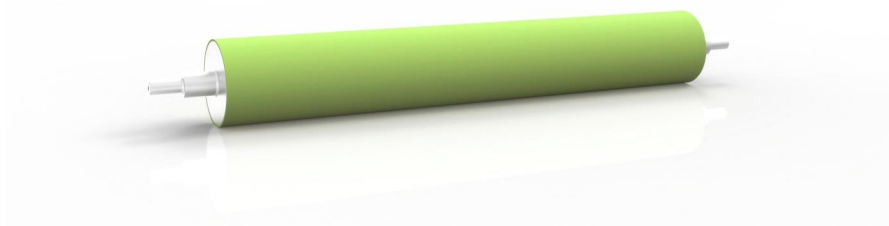

Cover Type:	Special rubber	
Possible applications:	All industries: rollers, wheels & parts submitted to high mechanical and/or dynamical load at elevated temperature Furnace entry/exit rollers Converting industries: conveyor, nip, backing, embosser and laminator rollers Rollers & wheels in contact with oil, petroleum or kerosene at high temperature	
Hardness Range:	70, 87, 96 Shore A	
Available Colours:	green, blue	
Recommended Cover Thickness:	min. 15 mm - max. 30 mm	
Temperature resistance:	Dry:	continuous 145°C / peak 160°C
	Wet:	continuous 80°C / peak 90°C
Properties and advantages:	Very high mechanical and dynamical properties - high load resistance Special high-load and high-temperature bonding technology High temperature resistance (up to max 160 °C) Excellent resistance to grease, mineral oil, petroleum and kerosene Light colour - non staining	
Chemical resistance:	Acid solutions:	Moderate
	Alkaline solutions:	Good
	Hot water and steam:	Good
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
	Alcohols (ethanol, IPA,...):	Very good
	Ageing resistance:	Excellent
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	