


# PureDrive-AS

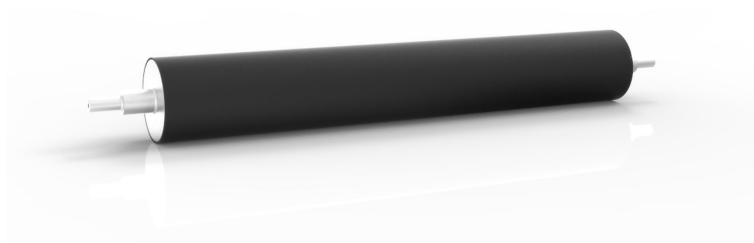

<b>Cover Type:</b>	Polyurethane	
<b>Possible applications:</b>	Rollers submitted to high load and/or high abrasion, rollers where cut-in resistance is important and where antistatic properties are required  Plastic film, flexible packaging, glass fibre & non-woven and aluminium industry : nip, counterpress, laminator rollers, detour and tensioning rollers	
<b>Hardness Range:</b>	80, 90, 95 Shore A	
<b>Available Colours:</b>	black	
<b>Recommended Cover Thickness:</b>	min. 10 mm - max. 25 mm	
<b>Temperature resistance:</b>	Dry: Wet:	continuous 80°C / peak 90°C continuous 40°C / peak 50°C
<b>Properties and advantages:</b>	Excellent abrasion, tear and cut-in resistance  Resistant to high load applications, excellent impact resistance  Easy to clean and to maintain	
<b>Specific characteristics:</b>	Antistatic	
<b>Chemical resistance:</b>	Acid solutions: Alkaline solutions: Hot water and steam: Ozone: Oil and grease: Aromatic solvents (toluene, benzene,...): Chlorinated solvents: Polar solvents (MEC, ether, acetate,...): Alcohols (ethanol, IPA,...):	Not suited Moderate Not suited Good Very good Not suited Not suited Not suited Good
<b>Recommended cleaning products:</b>	(Tepid) water, soap, industrial cleaners, cleaning fuel, terpentine, with limited use : alcohol	