


Hannecoil-D

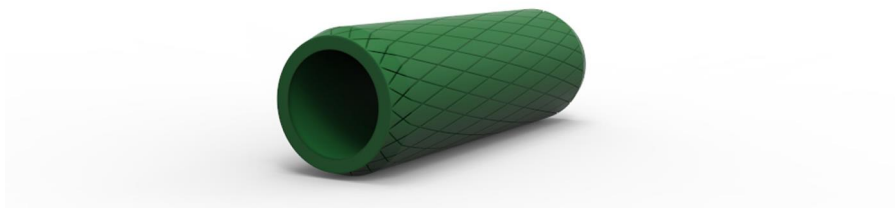

Cover Type:	Special rubber	
Possible applications:	<p>Elastic mandrel sleeves for winding and unwinding of metal coils (steel, stainless steel, aluminium and non-ferrous coils)</p> <p>Multi-layer structure to improve grip on the mandrel and avoid strip damage during (un)winding</p> <p>Dimensions and finish can be adapted to any specific need : adaptor sleeves, protective sleeves, grip improvement, evacuation of water or oil etc.</p>	
Hardness Range:	60, 70 Shore A	
Available Colours:	green	
Recommended Cover Thickness:	min. 20 mm - max. 100 mm	
Temperature resistance:	Dry:	continuous 100°C / peak 110°C
	Wet:	continuous 70°C / peak 80°C
Properties and advantages:	<p>Rubber structure consisting of multiple layers and hardness combinations</p> <p>Excellent elastic behaviour - low permanent deformation in use</p> <p>Very good physical properties, tear-, cut-in and abrasion resistance</p> <p>Excellent resistance to grease and to (mineral) oil</p> <p>Good solvent resistance, accepts most cleaning products</p>	
Chemical resistance:	Acid solutions:	Good
	Alkaline solutions:	Very good
	Hot water and steam:	Moderate
	Ozone:	Very good
	Oil and grease:	Excellent
	Aromatic solvents (toluene, benzene,...):	Moderate
	Chlorinated solvents:	Not suited
	Polar solvents (MEC, ether, acetate,...):	Not suited
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit	