


Hannecoil-D

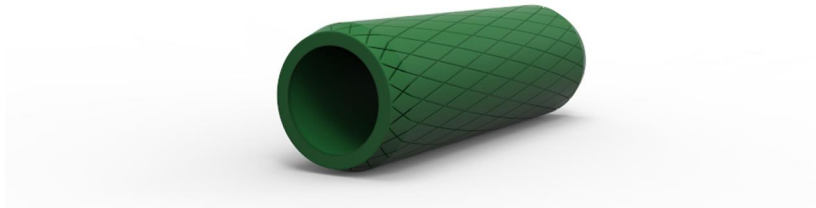

| | |
|---------------------------------------|--|
| Cover Type: | Special rubber |
| Possible applications: | Elastic mandrel sleeves for winding and unwinding of metal coils (steel, stainless steel, aluminium and non-ferrous coils) Multi-layer structure to improve grip on the mandrel and avoid strip damage during (un)winding Dimensions and finish can be adapted to any specific need : adaptor sleeves, protective sleeves, grip improvement, evacuation of water or oil etc. |
| Hardness Range: | 60, 70 Shore A |
| Available Colours: | green |
| Recommended Cover Thickness: | min. 20 mm - max. 100 mm |
| Temperature resistance: | Dry: continuous 100°C / peak 110°C Wet: continuous 70°C / peak 80°C |
| Properties and advantages: | Rubber structure consisting of multiple layers and hardness combinations Excellent elastic behaviour - low permanent deformation in use Very good physical properties, tear-, cut-in and abrasion resistance Excellent resistance to grease and to (mineral) oil Good solvent resistance, accepts most cleaning products |
| Chemical resistance: | Acid solutions: Good Alkaline solutions: Very good Hot water and steam: Moderate Ozone: Very good Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Moderate Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited |
| Recommended cleaning products: | (Hot) water, soap, most industrial cleaners, alcohol, light fuel, terpentine, white spirit |