


Optidraw Plus

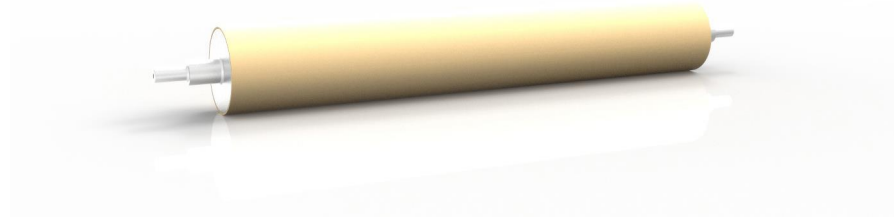

Cover Type:	Rubber
Possible applications:	<p>Production of metal strip : pinch rolls, hold-down rolls, steering, bridle and detour rolls, conveyor rollers, oil distribution and wipe-off rolls, squeegee rolls in different environments</p> <p>Diverse applications in a lot of industrial areas : textile, packaging, (card)board, plastic film, converting, glass, wood etc.</p> <p>Rollers and wheels in contact with oil, fuel or grease, even at higher temperature</p> <p>Finishing of the roller with peach skin</p>
Hardness Range:	65 Shore A
Available Colours:	beige
Recommended Cover Thickness:	min. 10 mm - max. 25 mm
Temperature resistance:	Dry: continuous 90°C / peak 110°C Wet: continuous 60°C / peak 80°C
Properties and advantages:	<p>Excellent resistance to mineral and vegetal oil, fuel, grease and (animal) fat</p> <p>Excellent properties, tear and abrasion resistance, good elasticity and resilience</p> <p>Non-staining in contact with delicate substrates</p> <p>Very good and stable grip in contact with most substrates</p> <p>Very good squeegee and wipe-off behavior</p>
Chemical resistance:	Acid solutions: Good Alkaline solutions: Very good Hot water and steam: Good Ozone: Good Oil and grease: Excellent Aromatic solvents (toluene, benzene,...): Good Chlorinated solvents: Not suited Polar solvents (MEC, ether, acetate,...): Not suited
Recommended cleaning products:	(Hot) water, soap, most industrial cleaners, alcohol, light fuel, turpentine, white spirit

Optidraw Plus
